




Large absorption refrigerators



- * Refrigerator doors can be converted to right hinge doors with the door swing kit.
- ** Refrigerators originally built in by a manufacturer can have different specifications. Average energy consumption at an ambient temperature of 25°C.

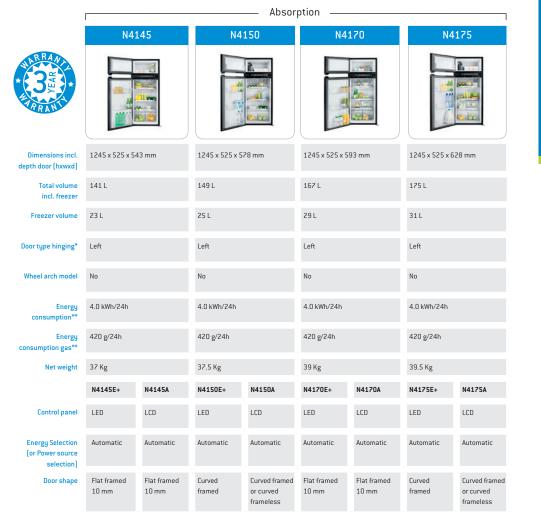

VENTS FOR THE VENTILATION OPENING FOR YOUR REFRIGERATOR

Thetford ventilation registers give a nice finish to the ventilation opening on the outside of your camper or caravan. An opening necessary to keep your refrigerator operating properly.

Our frames are available in different colors and sizes to best suit your vehicle.





COOLING APPLIANCES

THETFRD

ALL THE COMFORTS OF HOME



Do you want to be part of a group of campers who like to think along with us and do you also want to experience the benefits of being part of the Thetford Friends family?



▼ Receive latest news about our products

Tips and tricks to improve your camping experience

☑ Be the first to test new Thetford products

Sign in today to be a Thetford Friend!



SALES AND SERVICE POINTS

In Europe, there are more than 3,000 Thetford-approved sales and service points which can provide further help and advice about our products. Visit www.thetford.com and fill in your location [address, postcode and/or place] and click 'Find locations' to find the nearest Thetford sales point or service centre.

THETFORD IS THE WORLD'S NO. 1 MANUFACTURER OF:















TIPI















THETF\$\mathbb{R}\mathbb{D}\$

Freezer volume 6.6 L

Amount of days on a Day mode: 95Ah battery 3,0 Net weight 21 Kg

Compressor refrigerators







Please refer to the comparison table to find out which refrigerator matches your requirements.

Table top refrigerators

			— Comp	ressor –		Absorption						
		T10	90		T1152			N4:	141	N4142		
										Ba San		
Dimensions (hxwxd)	975 x 418 x 485 mm		975 x 418 x 485 mm		1500 x 418 x 578 mm		Dimensions (hxwxd)	1500 x 418 x	1500 x 418 x 561 mm		1500 x 418 x 561 mm	
Installation position	Handle at top		Handle at bottom		-		Total volume incl. freezer	141 L		142 L		
Total volume	90 L		90 L		152 L		Freezer volume	15 L		15 L		
reezer volume	6.6 L		6.6 L		18 L		Door type hinging*	Left		Left		
Door type hinging*	Right		Right		Right		Wheel arch model	No		No		
Energy onsumption **	Day mode: 0.40 kWh/24h	0.40 0.30 0.40 0.30		Night mode: 0.30 kWh/24h	Day mode: Night mode: 0.50 0.40 kWh/24h kWh/24h		Energy consumption**	3.9 kWh/24h		3.9 kWh/24h		
							Energy consumption gas**	400 g/24h		400 g/24h		
of days on a 95Ah battery	Day mode: 3,0	Night mode: 4,0	Day mode: 3,0	Night mode: 4,0	Day mode: 2,5	Night mode: 3,0	Net weight	38 Kg		37 Kg		
Net weight	21 Kg		21 Kg		34 Kg							
Control panel	LED		LED		LED		Energy Selection (or Power source selection)	Automatic		Automatic		
Door shape	Flat framed 10 mm		Flat framed		Flat framed 10 mm		Door shape	Flat framed 10 mm		Flat framed 10 mm		
							Exterior	External bottle drawer		Internal bottle drawer		
								N4141E+	N4141A	N4142E+	N4142A	
							Control panel	LED	LCD	LED	LCD	

			_	
		_		
NI 4	142			
N4	142			
B	A -			
418	x 561 mm			
h/24h				
24h				
atic				
med				
ıl bott	le drawer			
E+	N4142A			
	LCD			

	Absorption —												
	N4080	N4090		N4097		N4100		N4104		N4108		N4112	
	AA.a	AAA I		MA STE								AM COST	
Dimensions incl. depth door (hxwxd)	821 x 486 x 543 mm	821 x 525 x 543 mm		821 x 525 x 578 mm		821 x 525 x 543 mm		821 x 525 x 578 mm		821 x 525 x 593 mm		821 x 525 x 628 mm	
Total volume incl. freezer	81 L	89 L		96 L		97 L		105 L		106 L		113 L	
Freezer volume	10 L 11 L			11 L		11 L		11 L		14 L		14 L	
Door type hinging	Left	Left		Left		Left		Left		Left		Left	
Wheel arch model	Yes	Yes		Yes		No		No		Yes		Yes	
Energy consumption**	2.4 kWh/24h	2.6 kWh/24h		2.6 kWh/24h		2.8 kWh/24h		2.8 kWh/24h		2.6 kWh/24h		2.6 kWh/24h	
Energy consumption gas**	240 g/24h	270 g/24h		270 g/24h		330 g/24h		330 g/24h		270 g/24h		270 g/24h	
Net weight	22.5 Kg	22.5 Kg		23.5 Kg		27 Kg		27 Kg		24 Kg		24 Kg	
	N4080E+	N4090E+	N4090A	N4097E+	N4097A	N4100E+	N4100A	N4104E+	N4104A	N4108E+	N4108A	N4112E+	N4112A
Control panel	LED	LED	LCD	LED	LCD	LED	LCD	LED	LCD	LED	LCD	LED	LCD
Energy Selection (or Power source selection)	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Door shape	Flat framed 30 mm	Flat framed 10 mm	Flat framed 10 mm	Curved framed	Curved framed or curved frameless	Flat framed 10 mm	Flat framed 10 mm	Curved framed	Curved framed or curved frameless	Flat framed 10 mm	Flat framed 10 mm	Curved framed	Curved framed or curved frameless

New products are available as from 2020.

Product range may vary per country. For more information about the product range and the availability please check your local dealer.

^{*} The refrigerator door can be easily converted from left to right hinge.

^{**} Refrigerators originally built in by a manufacturer can have different specifications. Average energy consumption at an ambient temperature of 25°C.

^{*} Refrigerator doors can be converted to right hinge doors with the door swing kit.

 $^{\ ^{**}\ \}textit{Refrigerators originally built in by a manufacturer can have different specifications}.$ Average energy consumption at an ambient temperature of 25°C.